

BETA +

bottom inlet part 3 float valve




Applications

Fits virtually all float operated cisterns and offers the highest level of inlet valve adjustability.

Features

- ✓ Quick and easy installation
- ✓ User friendly adjustability
- ✓ Adjustable between 6" and 10"
- ✓ 3 lateral adjustment positions to improve variability in arm and float positioning
- ✓ High and low pressure valve configurations to suit mains and tank fed systems

Dimensional Data

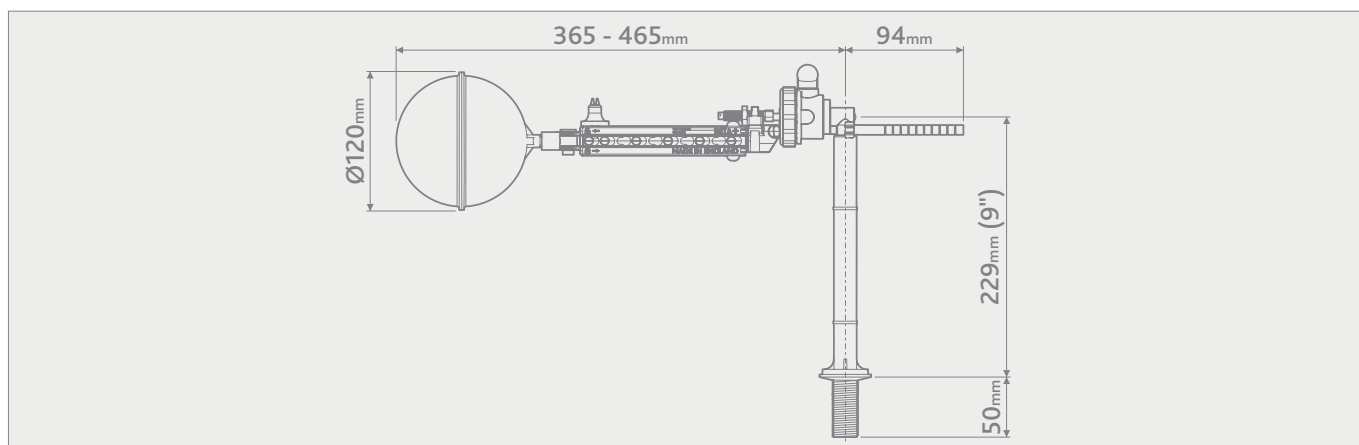

Technical Data

Pedestal Height	9" (229mm)
Adjustment Range	6 - 10" (152 - 254mm)
Thread Size	½" BSP
Operational Pressure Range	0.1 - 14 BAR
Material	Acetal
Arm Load Limit	Tested to 4.4N